



GUNNEBO® **SpeedStile** **FLS/BA/EV/DS**

Slim profile speed gate with swinging glass barrier

Gunnebo's SpeedStile FLS brings together slim design, versatility, efficiency, and uncompromised security. A minimal footprint and transparent, user-friendly design means the SpeedStile FLS can be placed in any environment where space is limited and aesthetics are valued.

Common Applications:

- Leisure
- Government
- Finance
- Banking
- Retail
- Telecommunications
- Information Technology
- Publishing
- Education

Key Features

- Safety force sensing
- Lower safety sensors (option)
- Accurate presence sensing
- Emitter/receiver infrared sensors technology
- Logic voltage 24 VDC
- Voltage-free contact input for fire alarm fail state
- Manual push opening on power off
- Anti-panic push opening in operation
- Wide walkway for wheelchair or easier access
- Accompanied wheelchair or child passage management



CALL US NOW 888•552•9046



ag.inc



125 E. Stansifer Ave
Clarksville, IN 47129

Technical Specifications

Standard Dimensions	Casework Length Casework Height Glass Barrier Height	47.2" / 55.1" / 73.6" 37.2" 34.4" / 47.2" / 59.1" / 70.9"	Walkway Width 28.0" std / 36.0" ada Casework Width 7.3" end unit / 9.8" center unit
Orientation, Drive	Bi-Directional, Motorized		
Materials	Pedestal* Pedestal Lid* Barrier Arms	#4 grade stainless steel and 0.4" thick tempered glass inlay Black Trespa (other materials available) 1.5" diameter stainless steel tube	
Drive Mechanism	<p>The moving panels are directly mounted to the output shaft of a DC electric motor and gearbox. The motor and gearbox assembly is mounted vertically in the central column. The moving panel position is monitored by a rotary encoder and the location, speed, and movement are controlled by microprocessor control system. The opening and closing speeds, home, and end positions are adjustable within the controller. Safety photocells prevent the panels from closing on an obstruction. Should the normal panel operation encounter an obstruction, the controlling logic detects an abnormal condition and stops the panels from moving.</p>		
Function	Passage in both directions is electronically controlled. Default mode is Normally Closed (NC), and lane will open only upon acceptance of an authorized signal.		
Flow Rates	Up to 60 users per minute (approximate figures).		
Operation	On receiving a signal from the access control system or pushbutton, the panels open. If an unauthorized person tries to tailgate or enter from the opposite direction, the system detects the unauthorized passage and activates the built-in alarm system.		
Fire Alarm	Input facility, for voltage-free contact supplied by others to effect fail state.		
Power Supply	115VAC 60HZ (230VAC 50HZ available)		
Power Rating	Stand By 20VA; In Operation 120VA		
Logic Voltage	24VDC		
Power Loss	In a loss of power the barrier arms will be completely de-energized and move freely with very minimal force to the open position.		
Certification	UL 2593; Outline for motor-driven turnstile operators and systems.		

* As standard: See Accessories and Options for alternatives



CALL US NOW 888•552•9046

ag.inc



125 E. Stansifer Ave
Clarksville, IN 47129

Operational Modes & Notifications

Interface

Potential free contact provided by either card reader or pushbutton input. Card reader inhibit and reset signals are available as standard. The unit has an adjustable time out facility if required; the go ahead symbol will be cancelled if the passage through the lane is not completed within a pre-set and field programmable time frame.

Operational Modes

Full-Time Barrier (Normally Closed Mode)

The swinging barrier arms remain closed until a valid access control card is presented. Tailgaters and unauthorized entries are signaled by an alarm-type tone. If an unauthorized card is presented, the lane will sound an alarm and the barriers will remain closed to prevent the user from proceeding further without intervention.

Standard Operating Modes

Switchable via optional pushbutton (DTC) or touchscreen (MP Touch) controller.

Enter/Card In	Reset
Exit/Card Out	Close
Free Exit/Card Out	

Pictogram Lights

LED display pictograms visually assist the user when passing through the unit. Included as standard.

Accessories & Options

Alternative Lid Materials and Finishes Square or round ends. Black Trespa is standard. Stainless steel, Corian, marble, and powder coat paint available.

Card Reader Options Custom integration of customer supplied readers into pedestal lid. Maximum flush mounted card reader size on lid is 9.8" x 3.3" x 1.2". Bar code scanners mounted to front end leg

Remote Lane Control Remote lane control via personal computer, tablet, or smartphone. Optional desktop pushbutton (DTC) or touchscreen (MP Touch) controller with advanced controls.

Alternative Mounting Specialized mounting base platforms giving concealed cableway and requiring no drilling, trenching, or core drilling to the floor.

Static Panels When extra space presents in a design, integrated or standalone barrier solutions can be provided.

Elevator Destination Dispatch Mounting integration of customer-supplied LCD screens for elevator destination dispatch systems.



CALL US NOW 888•552•9046



ag.inc







125 E. Stansifer Ave
Clarksville, IN 47129

Standard Dimensions

Gunnebo SpeedStile FLs

For installation details, please refer to the installation manual.

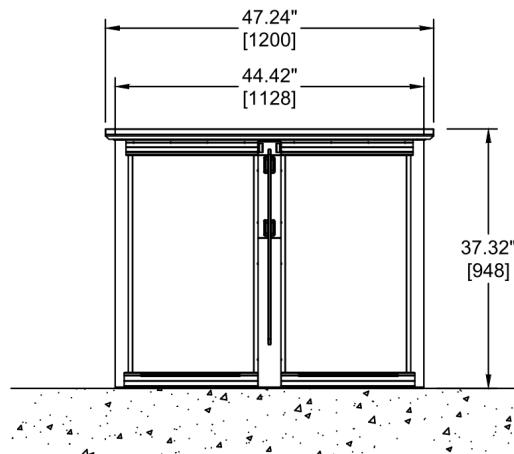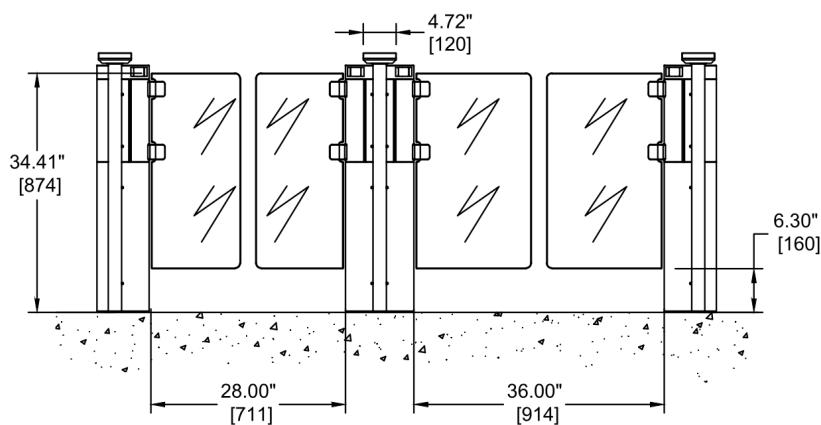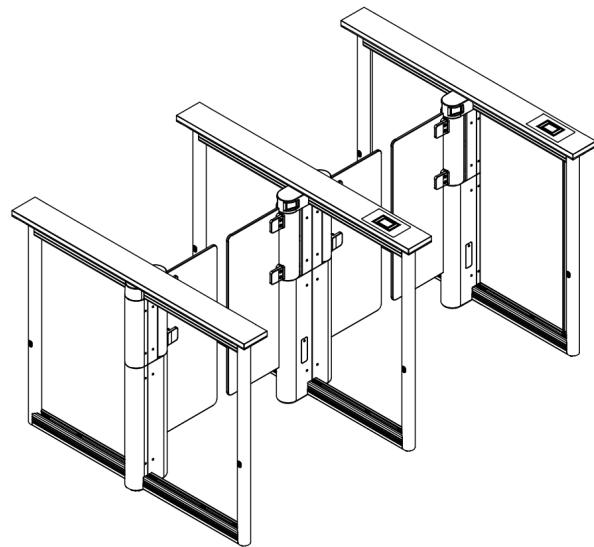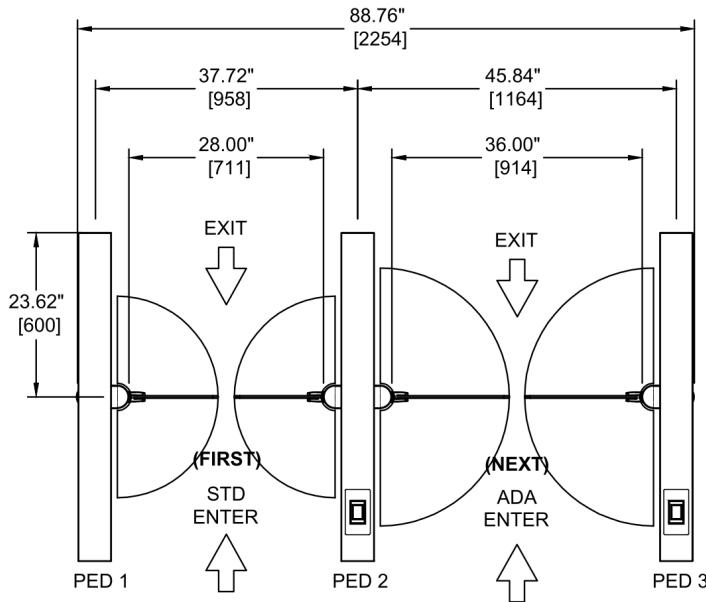

CALL US NOW 888•552•9046



ag.inc



125 E. Stansifer Ave
Clarksville, IN 47129